

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 October 2004 (28.10.2004)

PCT

(10) International Publication Number
WO 2004/091457 A1

(51) International Patent Classification⁷: **A61F 7/00**

(21) International Application Number:
PCT/LV2004/000003

(22) International Filing Date: 16 April 2004 (16.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
P-03-41 16 April 2003 (16.04.2003) LV

(71) Applicant and

(72) Inventor: BARANOVS, Aleksandrs [RU/LV]; Dzirnava
iela 73-2, LV-1011 Riga (LV).

(74) Agent: GENCS, Valters; Law Offices of Valters Gencs,
Kr. Valdemara Street 21, LV-1010 Riga (LV).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- with amended claims

Date of publication of the amended claims: 13 January 2005

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: CRYOTHERAPEUTIC DEVICE

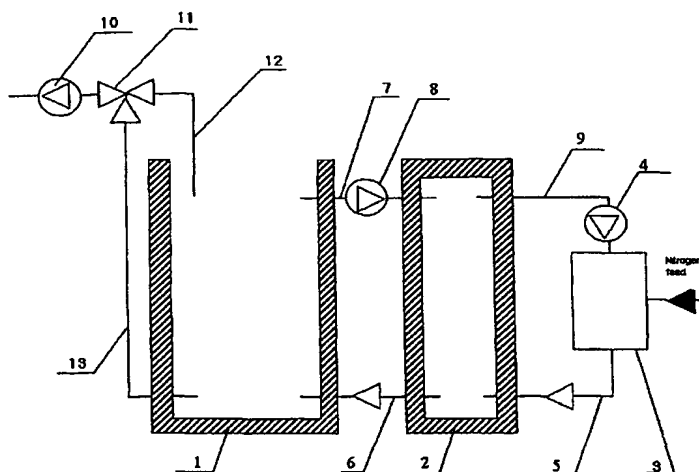

(57) **Abstract:** The discovery refers to medical equipment, but more specifically is used as a facility for rehabilitation and prophylactic physiotherapeutic procedures. The discovery is aimed at reduction of liquid nitrogen used during procedures and improvement of working conditions for servicing personnel. -This aim is reached due to the fact that the cryotherapeutic facility, which includes a subsequently installed cabin for the patient, the heat-isolating reservoir with the ventilator and the system of cryostatistics with gas consumption stimulator is supplemented with a system installed for utilization of produced gas, which consists of pipes with a tap and a three-step valve. Besides, the gas stimulator is linked to the pipe with heat-isolating reservoir, but the ventilator is installed on the pipe, which connects the cabin for the patient with the heat-isolating reservoir. Repeated use of low-temperature gas reduces consumption of liquid nitrogen by 2.5 times. Existence of gas in the facility of utilization system does not allow movement of nitrogen vapor into the room of medical procedures. The system automatically removes all excess gas produced as a result of vaporization of liquid nitrogen.

WO 2004/091457 A1

AMENDED CLAIMS

[received by the International Bureau on 01 November 2004 (01.11.04);
original claim 1 has been replaced by amended claim 1;]

Cryotherapeutic device containing in the consecutive order set the cabin for the accommodation of the patient (1), heat insulated vessel (2) with the ventilator (8), system of gas cooling and transportation (3) with the ventilator (4) is notable for that the ventilator (4) is connected with the heat insulated vessel (2) pipe (9), but the ventilator (8) is mounted on the pipe (7) that connects the cabin for the accommodation of the patient (1) and the heat insulated vessel. The device according to the clause 1 is notable for that it is provided with the system of the exhaust gas removal, that is formed by the three-linked valve (11), pipes (12,13) and the ventilator 10.

CRYOTHERAPEUTIC DEVICE

The discovery refers to medical equipment, which is used as a facility for rehabilitation and prophylactic physiotherapeutic procedures.

This equipment is well-known for general cryotherapy and consists of a chamber for locating of a patient, the system for drying, cooling and transportation of cold air. The equipment is also furnished with heat-isolating reservoir with a ventilator, which is connected to the chamber for locating the patient and the system of drying, cooling and transportation of air. Besides, there is a shutoff valve, which is located between the chamber for locating the patient and the heat-isolating reservoir. /prototype – author's registration No. 1684979 in the USSR/ A disadvantage of this discovery is increased utilization of liquid nitrogen, which is connected with the fact that the cryogenic gas after the chamber for locating the patient is discharged in atmosphere. Usage of nitrogen means high energy consumption for carrying out medical procedures.

The proposed useful model is aimed at reducing energy expenses and improvement of work safety for medical personnel.

This aim can be reached based on the fact that the cryotherapeutic facility, which includes a subsequently installed cabin for the patient, the heat-isolating reservoir with the ventilator and the system of cryostatistics with gas consumption stimulator is supplemented with a system installed for utilization of produced gas, which consists of pipes with a tap and a three-step valve. Besides, the gas stimulator is linked to the pipe with heat-isolating reservoir, but the ventilator is installed on the pipe, which connects the cabin for the patient with the heat-isolating reservoir.

Reduction of electricity is achieved by means of the method that the system of cryostatistics is enforced by being thermally closed because the gas stimulator is connected with the pipe of heat-isolating reservoir, but the ventilator is installed on the pipe, which connects the cabin for locating the patient with the heat-isolating reservoir. This gives a possibility to decrease electricity consumption at the expense

of circularization of processed gas through the system of cryostatistics, which cools gas to the indicated temperature of cryo-operation and ensures equalizing of field of temperatures in the cabin for locating the patient. Utilization of processed gas after all is based on consumption of liquid nitrogen.

Improvement of work safety for medical personnel which services cryotherapeutic equipment is achieved due to the fact that it additionally includes a system for reducing of excess gas a result of processing, which is done by pipes with a tap and a three-step valve. This gives a possibility to remove from the upper part of the cabin for locating the patient the excess gas into the atmosphere, i.e., the steam of liquid nitrogen does not get into the room where procedures are carried out. The chain of cryotherapeutic equipment is seen in the enclosed picture. It consists of subsequently connected cabin 1 for locating the patient, heat-isolating reservoir 2, system for cryostatistics 3. These devices are linked to each other with pipes: pipe 5 connects the system for cryostatistics 3 with the heat-isolating reservoir 2, pipe 6 connects the heat-isolating reservoir 2 with the cabin for locating the patient 1; pipe 7 with the ventilator 8 connects at the upper part of facility the cabin for locating the patient 1 with heat-isolating reservoir 2, pipe 9 with the gas stimulator 4 connects the heat-isolating reservoir 2 with the system for cryostatistics 3. The cryotherapeutic facility also includes a system for removal of processed gas, which consists of a pipe for final pumping 13 with the ventilator 10, three-step valve 11 and pumping pipe 12.

The facility is working in the following way. The cold gas from the heat-isolating reservoir 2 gets into the cabin 1 for locating the patient through the pipe 6. When going upward, gas takes the heat from the body of patient and walls of the cabin 1 and warms up by 10-20 degrees. At the upper part of the cabin, there is a pipe 7, on which a ventilator 8 is installed, which ensures circularization of gas between the cabin for locating the patient 1 and the heat-isolating reservoir 2. Temperature of gas in the heat-isolating reservoir 2 is maintained by means of system for cryostatistics 3. Then, gas through the pipe 9 warms up by gas stimulator 4 into the system for cryostatistics 3 where it is cooled by means of heat exchange with liquid nitrogen and through the pipe 5 it returns to the heat-isolating reservoir 2.


During a procedure in the facility, vaporization of liquid nitrogen in the system for cryostatistics 3 results in excess gas in the amount of 3-4 kgs, and gas through the pipe 12 and three-step valve 11 is pumped from the level which is located between the pipe 7 and the upper part of cabin 1. Removal of nitrogen gas in the form of vapor protects breathing organs of the patient and limits entry of nitrogen vapor into the room of procedures.

At the end of the procedure of therapeutic impact, three-step valve 11 gets connected to the pipe for removal of processed gas 10. Low-temperature gas in the amount of 1-1.2 kgs is removed into the atmosphere before the patient gets out of the cabin, therefore it cannot get into the room of procedures.

Operation of cryotherapeutic facility has shown that the given construction is energy-saving and simple in manufacturing and it will find a good realization in medicine.

Claim

The cryotherapeutic facility, which consists of the cabin for locating the patient, the heat-isolating reservoir with a ventilator and a system for cryostatistics with heat-carrier consumption stimulator, is different from others with the fact that it additionally includes a system of utilization of processed gas which is performed by pipes with the ventilator of three-step valve, heat-carrier consumption stimulator is connected by means of a pipe with the heat-isolating reservoir, but the ventilator is installed on the pipe, which connects the cabin for locating the patient with the heat-isolating reservoir.

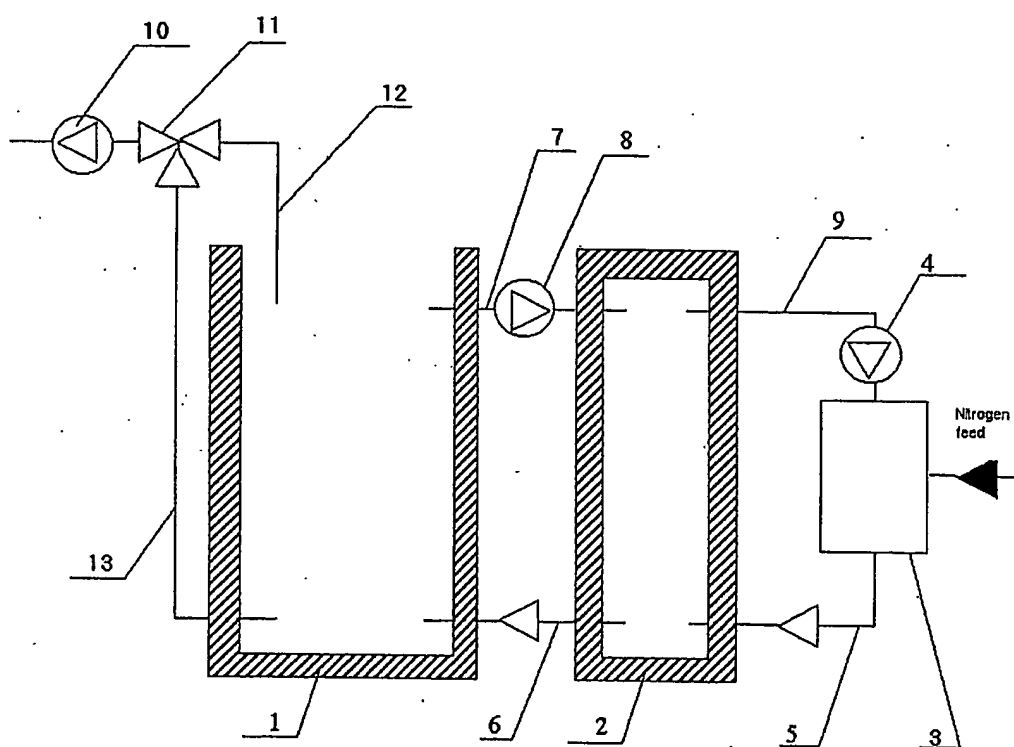

INTERNATIONAL SEARCH REPORT

International Application No

PCT/LV2004/000003

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F A61H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 226 107 A (DITTMAR BERND ; BLAUDSZUN BERND DIPL ING (DE)) 24 June 1987 (1987-06-24) the whole document	1
A	US 4 880 003 A (DONNERHACK ANDREAS ET AL) 14 November 1989 (1989-11-14) column 2, line 34 - line 57; figure 4	1
A	GB 740 945 A (ERIC FREDERICK ST JOHN LYBURN) 23 November 1955 (1955-11-23) the whole document	1
A	DE 35 35 699 A (MESSER GRIESHEIM GMBH) 9 April 1987 (1987-04-09) column 3, line 10 - line 11; figure 3	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

25 August 2004

Date of mailing of the international search report

01/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mayer-Martenson, E

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/LV2004/000003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0226107	A	24-06-1987	DE	3543390 A1	11-06-1987
			DE	3633637 A1	14-04-1988
			AT	65901 T	15-08-1991
			CN	86108116 A	22-07-1987
			DE	3546523 A1	11-06-1987
			DE	3680767 D1	12-09-1991
			WO	8703472 A1	18-06-1987
			EP	0225571 A2	16-06-1987
			EP	0226107 A1	24-06-1987
			JP	62190377 A	20-08-1987
			JP	63502321 T	08-09-1988
US 4880003	A	14-11-1989	DE	3534630 A1	02-04-1987
			AT	50138 T	15-02-1990
			EP	0220479 A1	06-05-1987
GB 740945	A	23-11-1955	US	2821982 A	04-02-1958
DE 3535699	A	09-04-1987	DE	3535699 A1	09-04-1987